PAPER ROLL SPECIAL



PAPER, HANDLED

12000 lb. Capacity

CLASS

- Enhanced Dust & Debris Filtration
- Specialized Counterweight
- 20% More Fuel Efficient

8FGC55U-PRS

TOYOT

-

1

PAPER ROLL HANDLING, PERFECTED

THE TOYOTA PAPER ROLL SPECIAL FORKLIFT. The product:

Heavy, awkward, easily damaged. The environment: Dusty, dirty, did we mention dusty? Paper handling presents exacting demands. The Paper Roll Special meets them, safely and efficiently. Equipped to stack and maneuver heavy paper rolls, it's the perfect solution for paper mills, printing plants, newspaper production and similar applications. Paperwork? Done.

PAPER ROLL SPECIAL ADVANTAGES

FACTORY-INSTALLED CASCADE PAPER ROLL CLAMP

option is designed specifically for handling heavy, delicate paper rolls

CLAMP RELEASE INTERLOCK option prevents accidental release of clamp

AUTOMATIC CLAMP LEVELING positions clamp vertical to paper roll, improving efficiency and productivity, and limiting product damage

SPECIALIZED MAST DESIGN and lift height allows for stacking large paper rolls up to three high

SHORTENED WHEELBASE, LOAD DISTANCE & RIGHT-ANGLE STACKING RADIUS for greater maneuverability

COMPACT COUNTERWEIGHT for additional maneuverability

02

LARGE RADIATOR & COOLING FAN handle damp, humid paper- and pulp-processing environment

ENGINE & RADIATOR FILTRATION SYSTEMS are designed to keep out excess dust and debris common in paper-handling applications

FILTERS OUT DUST & DEBRIS

POWERFUL 3.7 LITER, 4-CYLINDER TOYOTA-BUILT

ENGINE is designed to increase productivity and fuel efficiency, particularly in a 24/7 paper mill

ENGINE PROTECTION SYSTEM automatically reduces power if coolant temperature rises to potentially damaging levels

ΤΟΥΟΤΑ

CAPACITY 12000 LBS. WHEELBASE 70.5 IN.

INDUSTRIES

6

STANDARD FEATURES

Paper

 Control Area Network (CAN-bus) communication Fully stamped steel side panels Full-floating front axle Moisture-resistant electric connectors 	 High cooling capacity radiator Low-maintenance battery Large-capacity engine cooling fan 8" cyclone air cleaner Plate-iron front fenders 	 Anti-restart ignition key switch Stamped steel engine hood Radiator screen External hydraulic oil cooler
SAFETY		
 System of Active Stability[™] (SAS) Operator Presence Sensing System (OPSS) Bolt-on overhead guard 	Key lowering interlockElectric hornNeutral start safety switch	Conventional headlightsOrange forks
PERFORMANCE		
 EPA/CARB-certified engine Toyota 3.7 liter, 4-cylinder, OHV gasoline engine (1FS) Electronic fuel injection Distributorless ignition system Automatic clamp leveling UL-approved model type "LP" Full-floating powertrain Limited free-lift 2-stage mast (V) Hydraulic valve lifters 	 Integrated monitoring system - includes: Digital hour meter display Engine coolant temperature gauge Check engine light Engine oil pressure warning light Battery charge warning light OPSS activation light SAS/OPSS warning light Adjustable headlights with guards Double action parking brake (hand) 	 Alternator with built-in regulator (60A) Automatic transmission with oil cooler Load-sensing power steering Integrated headlight & turn signal lever Electric shift control Speed control Engine protection system Hydraulic system tuned for clamping attachments
ERGONOMICS		
 Dash-mounted instrument display 11.8"-dia., 2-spoke steering wheel Load-sensing power steering 	 12"-long dual operator assist grips Heavy-duty non-slip rubber floor mat Low, wide entry steps 	 Dash-integrated amenity tray & oversized cup holder Non-cinching seatbelt
 Cowl-mounted hydraulic control levers with rubber boot covers 	 Low-profile front cowl Vinyl 4-way adjustable full-suspension seat 	 Slim profile, tilt steering column
SERVICEABILITY		
 Easy access no tools required floorboard Engine hood assist damper with lock device Air cleaner discharge valve 	 Dash-mounted brake fluid level check Easy-lift engine hood with wide 75° opening 	 Easy access to common service items such as filters & dipsticks

OPTIONAL EQUIPMENT

- Multifunction digital display
- Intelli-Shift
- Mini-lever controls with ErgoShift
- Synchronized steering
- EZ Pedal foot directional control
- Combination brake & inching pedal
- Steering wheel with knob
- Hydraulic accumulators 1 or 2 quarts
- Front combination lights

- High-mount rear combination lights
- Strobe lights
- LED front headlights
- LED rear combination lights
- LED rear work light
- LED reverse-activated rear work light
- Cloth 4-way adjustable
- full-suspension seat
- Swivel seat

- Orange seatbelt
- Box fin radiator
- Pre-cleaner for air intake
- Rearview mirrors
- 12-Volt power supply
- Rear assist grip with horn button
- Back up alarms
- 5-way hydraulics


TRUCK SPECIFICATIONS

FRUCK SPE			-		MODEL NUMBER
GENERAL DATA					8FGC55U-PRS
Load Capacity				lb (kg)	12000 (5500)
Load Center				in (mm)	24 (600)
Power Type					LPG
Operator Position					Seated Rider
Tire Type Front / Rear					Cushion / Cushion
Wheels (x = driven) Front / Rear			Front / Rear		2x / 2
EXTERIOR DIME					8FGC55U-PRS
Maximum Fork Height (top of forks)				in (mm)	N/A
Free-Lift (top of forks)				in (mm)	N/A
Fork Size (T x W x L)				in (mm)	No Forks
Fork Spread Max. / Min. (outer edge to edge)			edge)	in (mm)	46.1 (1170) / 11.8 (300)
Tilt Range (forward / backward)				deg	5/6
Length to Fork Face Overall Width				in (mm) in (mm)	N/A 55.9 (1420)
Mast Lowered Height				in (mm)	86.6 (2200)
Mast Extended H	-	n of load ba	rkrest)	in (mm)	174.6 (4435)
Overhead Guard I				in (mm)	83.5 (2120)
Turning Radius (i	-	utside)		in (mm)	93.5 (2380)
Load Distance				in (mm)	N/A
Basic Right-Angle	e Stackir	ng Aisle Widt	h	in (mm)	_
PERFORMANCE					8FGC55U-PRS
FERFORMANCE	1	- ·	Full Load	mph (km/h)	13.0 (21.0) / 13.0 (21.0)
		um Travel d / reverse)	No Load	mph (km/h)	13.0 (21.0) / 13.0 (21.0)
	(-, ,	Full Load	fpm (mm/sec)	85 (430)
Speeds	Lifting		No Load	fpm (mm/sec)	87 (440)
			Full Load	fpm (mm/sec)	102 (520)
	Loweri	ŋg	No Load	fpm (mm/sec)	93 (470)
			Full Load	lb (kg)	9900 (4500)
Drawbar Pull	Maxim	um	No Load	lb (kg)	3300 (1500)
1r	1 mph (1.5 km/h)	Full Load	%	25
Gradeability ¹ Maxir			Full Load	%	34
	Maxim	um	No Load	%	18
TRUCK WEIGHT	S				8FGC55U-PRS
Total Weight				lb (kg)	17220 (7810)
_	- Eull Load (front / roar)		lb (kg)	25140 (11460) / 4080 (1850	
Neight		l (front / rear)		lb (kg)	5800 (2630) / 11420 (5180)
TIRES			,		8FGC55U-PRS
IINES	Numbe	r (front / roo	•)		
Tiroe	INUINDE	r (front / rea			2/2
Tires	Size		Front Rear		22 x 12 x 16 18 x 8 x 12-1/8
Wheelbase			. 1001	in (mm)	70.5 (1790)
Tread Width (front / rear)				in (mm)	43.9 (1115) / 43.5 (1105)
Underclearance Minimum with Load		in (mm)	3.3 (85)		
full load) Center of Wheelbase		in (mm)	5.7 (145)		
Brake	Service (foot) / Parking			Hydraulic / Hand	
POWER SYSTEM					8FGC55U-PRS
Battery (5-hour ra				V / Ah	12/48
		Make / Moo	lel	.,	TOYOTA 1FS
				SAE HP	89 @ 2550
	Rated Horsepower @ rpm		(kW)	(66 @ 2550)	
					210 @ 1200 - 1400
nternal				SAF TT-ID	
Combustion		Rated Torqu	ue @ rpm -	SAE ft-lb (N-m)	
Combustion				SAE т-ю (N-m)	(290 @ 1200 - 1400)
Combustion		Number of	Cylinders	(N-m)	(290 @ 1200 - 1400) 4
Internal Combustion Engine		Number of Piston Disp	Cylinders lacement	(N-m) cu in (cc)	(290 @ 1200 - 1400)
Combustion		Number of Piston Disp Fuel Tank C	Cylinders lacement	(N-m)	(290 @ 1200 - 1400) 4 224 (3685) —
Combustion		Number of Piston Disp Fuel Tank C Type	Cylinders lacement apacity	(N-m) cu in (cc) US gal (liter)	(290 @ 1200 - 1400) 4 224 (3685) - Automatic
Combustion Engine	in	Number of I Piston Disp Fuel Tank C Type Speeds (for	Cylinders lacement	(N-m) cu in (cc) US gal (liter)	(290 @ 1200 - 1400) 4 224 (3685) —

Computed values. Performance of LPG fuel system may be less than performance of standard model shown. Values taken at Hydraulic Control Valve. Does not take in to consideration losses through mast plumbing (hosing, fittings, QDs, etc.). 2





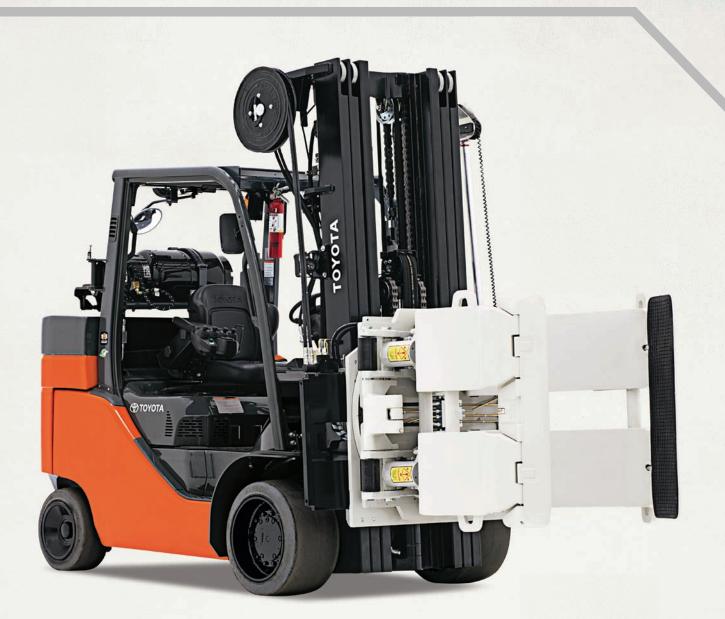

COUNT ON THE LEADER

- Toyota leads in quality, durability, reliability and value, thanks to advanced technology and the world-renowned Toyota Production System.
- With the broadest and most complete set of materialhandling solutions in the industry, Toyota Dealers specialize in meeting all of your needs — from a single forklift to an entire fleet.
- Toyota's industry-leading network of dealers backs every forklift with proven product support. Resources include factory-trained service technicians, Toyota Genuine Parts, and flexible leasing and financing packages through Toyota Commercial Finance.
- Toyota forklifts have ranked No. 1 in safety and quality since 2002, according to studies conducted by Peerless Research Group.

For more information, including full specs, see your Toyota Dealer or **ToyotaForklift.com**.



Some product features described herein are optional. Please consult your dealer for specifications. Details of specifications and equipment are based on information available at time of printing and may change without notice.