
S3215E/S3219E ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric scissor lifts
- Compact & nimble
- Drives through a standard doorway
- Suitable for indoor and outdoor use
- Easy to use & maintain

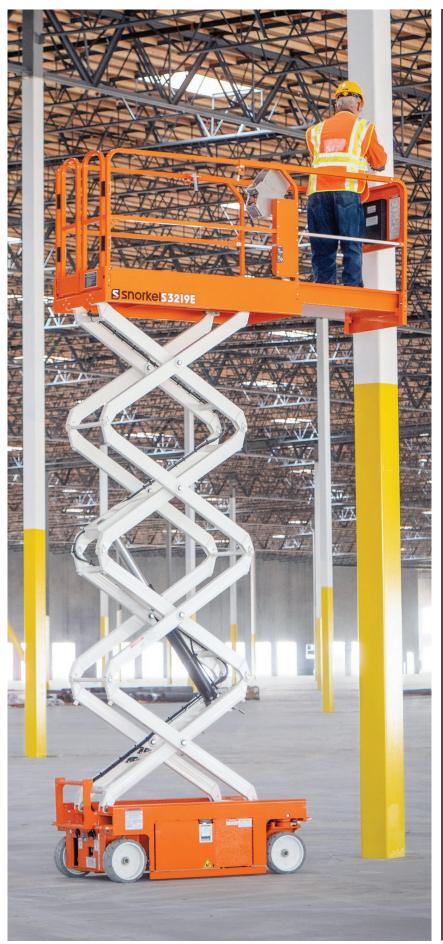

ELECTRIC SLAB SCISSOR LIFTS

S3215E/S3219E

| DIMENSIONS | \$3215E | \$3219E |
|--|---------------|---------------|
| Max. working height | 6.6m | 7.79m |
| Max. platform height (A) | 4.6m | 5.79m |
| Platform size (stowed) | 0.72m x 1.62m | 0.72m x 1.62m |
| Platform size (extended) | 0.72m x 2.53m | 0.72m x 2.53m |
| Extension deck length | 0.91m | 0.91m |
| Overall length (with step) (${f C}$) | 1.78m | 1.78m |
| Overall length (without step) | 1.73m | 1.73m |
| Overall width (D) | 0.81m | 0.81m |
| Stowed height (B) | 2.02m | 2.11m |
| Min. height (guardrails folded) | 1.59m | 1.65m |
| Ground clearance (stowed) | 66mm | 66mm |
| Ground clearance (elevated) | 19mm | 19mm |

| PE | RF | 0 | R | M | A | N | С | |
|----|----|---|---|---|---|---|---|--|
| | | | | | | | | |

| PERFORMANCE | | | |
|-----------------------------|--------------|---------------------------|--|
| Platform capacity (SWL) | 272kg | 250kg | |
| Max. drive height | 4.6m | 5.79m | |
| Max. wind speed | 12.5m/s | 12.5m/s | |
| Max. drive speed (stowed) | 3.2km/h | 3.2km/h | |
| Max. drive speed (elevated) | 0.6km/h | 0.6km/h | |
| Raise/lower time | 20/36 sec | 20/38 sec | |
| Gradeability | 25% | 25% | |
| Inside turning radius | 0.1m | 0.1m | |
| Outside turning radius | 1.63m | 1.63m | |
| Tires | 12 x 4 non-m | 12 x 4 non-marking rubber | |
| Controls | proportional | | |
| Drive system | 2 whe | el drive | |
| POWER | | | |
| Power source | 24V DC ba | 24V DC battery electric | |


| Charger | 90 - 240V, 25amp |
|---------|------------------|
| | |


WEIGHT


Weight

1,227kg

TURNING RADIUS







STANDARD FEATURES

- Roll-out deck extension with dual locks
- Non-marking tires
- Loading control pendant
- Swing-out service trays
- Saloon-door style entry gates •
- Descent alarm •
- All motion alarm
- 2 persons indoor •
- 1 person outdoor •
- Proportional controls, including descent •
- Power line to platform
- Hour meter & onboard diagnostics display
- Integrated battery charger •
- Battery condition indicator
- Crane & forklift points •
- Dual lanyard attachments points
- Flashing amber light
- Scissor stack roller slide plates (set of 2) •
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant •

OPTIONS

1,614kg

- Special paint colors •
- Snorkel Guard[™] secondary guarding system
- Environmental hydraulic oil •
- Airline to platform •
- Aircraft bumpguard package
- Panel carrier •
- Pipe rack •
- Top rail •



P.O. Box 1160 St.Joseph, MO 64502-1160, USA Tel: 1 (785) 989-3000 Toll-free: 1 (800) 255-0317 Fax: 1 (785) 989-3070 Email: sales.usa@snorkellifts.com

vww.snorkel llifts.com