INDUSTRIAL TOW TRACTOR



HAULING MACHINE

- 15,000 lb. Capacity on Flat Surfaces
- 24V Electrical System
- AC Drive Motor
- Power Steering

CLASS

Cold Storage Conditioning

TT1-HC150

4 MOX0

IN IT FOR THE LONG HAUL

When it comes to heavy-duty towing, Toyota's Industrial Tow Tractor is here to get the job done. Designed with a towing capacity of 15,000 lbs. on flat surfaces, this piece of equipment is capable of towing even the heaviest of loads with ease. Its power steering capability allows you to transport items from point A to point B seamlessly, so you never have to worry about getting the job done. The Toyota Industrial Tow Tractor is the versatile, efficient tugger you need in your fleet.

INDUSTRIAL TOW TRACTOR ADVANTAGES

POWER STEERING decreases the amount of effort required to steer, increases operator comfort and efficiency

COLD STORAGE CONDITIONING protects components from condensation and cold temperatures

 OPERATOR COMPARTMENT SENSOR encourages the operator to stand in the proper position for optimal comfort

LARGE MAGNETIC BATTERY-MOUNTED STORAGE TRAY OPTION provides storage for operators to place their items

TURTLE SPEED BUTTON slows the maximum operating speed for improved control and precision



15,000 LB.



HEAVY DUTY TOWING

When you need to move products quickly and easily through your facility, Toyota's Industrial Tow Tractor is the right piece of equipment for the job. Equipped with an AC Drive Motor, this tugger provides the power you need to accomplish your daily tasks. Additionally, the Industrial Tow Tractor includes regenerative plugging, which not only reduces energy costs but results in increased efficiency and productivity shift after shift. Programmable performance comes standard to allow customization for a variety of applications.

ERGONOMICALLY PRODUCTIVE

We designed the Toyota Industrial Tow Tractor to not only work with you but for you. This equipment includes a multifunction control handle with ergonomically positioned handgrips, dual thumbwheels, and lift, lower, and horn buttons for simplified operation of all controls with either hand. The Industrial Tow Tractor comes equipped with a cushioned operator backrest and knee pad to provide operator comfort while traveling forward and in reverse. The operator compartment sensor also encourages the operator to stand in the proper position for optimal comfort and performance.



SFEGIAL MUDELS

Special Paint Color

• Bilingual Decals


• Export Preparation Packaging




TRUCK SPECIFICATIONS

| TRUCK SPECIFICATIONS | | | | | MODEL NUMBER | |
|----------------------|---|--------------------------------|-----------------------|-------------|--|--|
| GENERAL DATA | | | | | TT1-HC150 | |
| Load Ca | pacity | | | lb (kg) | 7500 (3402) on grades up to 11% 15000(6800) on Flat Surfaces | |
| Power Ty | уре | | | | Battery | |
| Operator Position | | | | | Center-Controlled Rider Tow Tractor | |
| Tire Type | | | Drive / Caster / Load | | Rubber / Polyurethane / Polyurethane | |
| Wheels | | Front / Rear | | | 1 Drive / 2 Rear | |
| EXTERI | OR DIME | NSIONS | | | ТТ1-НС150 | |
| Α | Overall \ | Width | | in (mm) | 33.25 (845) | |
| в | Overall L | _ength | | in (mm) | 75.7 (1923) | |
| C | Wheelba | ase | | in (mm) | 55.7 (1415) | |
| D | Turning | Radius | | in (mm) | 69.8 (1773) | |
| Е | Power U | nit Height | | in (mm) | 38 (965) | |
| F | Overall H | leight | | in (mm) | 56-61 (1422-1549) | |
| G | Operator | r's Platforn | n Height | in (mm) | 8.3 (211) | |
| н | Operator | r's Platforn | n Depth | in (mm) | 21.8 (554) | |
| Т | Distance from Bumper to Center of Drive Tire | | | in (mm) | 13.3 (338) | |
| J | Bumper | Underclea | irance | in (mm) | 3 (381) | |
| к | Bumper | Height | | in (mm) | 15 (381) | |
| | Gross Weight Without Battery lb (kg) | | lb (kg) | 3410 (1547) | | |
| PERFOR | RMANCE | DATA | | | тті-нсі50 | |
| T | ravel Speed | | Full Load | mph (km/h) | 6 (9.6) | |
| iravei S | | | No Load | mph (km/h) | 6 (9.6) | |
| | Drawbar Pull | | Continuous | lb (kg) | 350 (159) | |
| Jrawbai | | | Maximum | lb (kg) | 1600 (726) | |
| IRES | | | | | ТТ1-НС150 | |
| | Numbe | Number Front / Rear | | | 1/2 | |
| Tires | Size (dia. x width) | | Drive (front) | in (mm) | 12 x 4.75 (305 x 121) | |
| | | | Rear | in (mm) | 10 x 4 (254 x 101) | |
| OWER | SYSTEM | Λ | | | ТТ1-НС150 | |
| | 1 | Voltage / Capacity V / Ah | | V / Ah | 24 / 750 | |
| | C | Connector (Color) | | | SB-175 (Gray) | |
| Battery | C | Connector Cable Location | | | В | |
| | C | Connector Cable Length in (mm) | | in (mm) | 18 (457) | |
| | v | Width in (mm) | | in (mm) | 13.93 (354) | |
| Battery Compa | | ent Length | | in (mm) | 31.68 (806) | |
| | uneni – | Height | | in (mm) | 31 (787) | |
| Battery | | Maximum | | lb (kg) | 1500 (680) | |
| Weight | Minimum | | | lb (kg) | 1300 (589) | |
| Electric Motors | | | minutes) | hp (kW) | 4.4 (3.3) | |

EXTERIOR DIMENSIONS

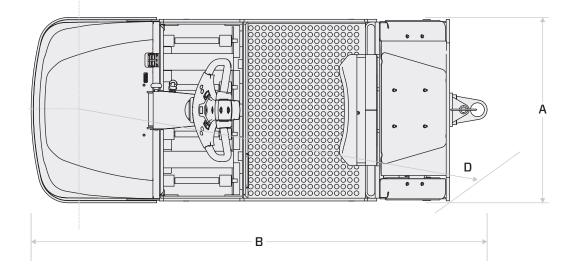

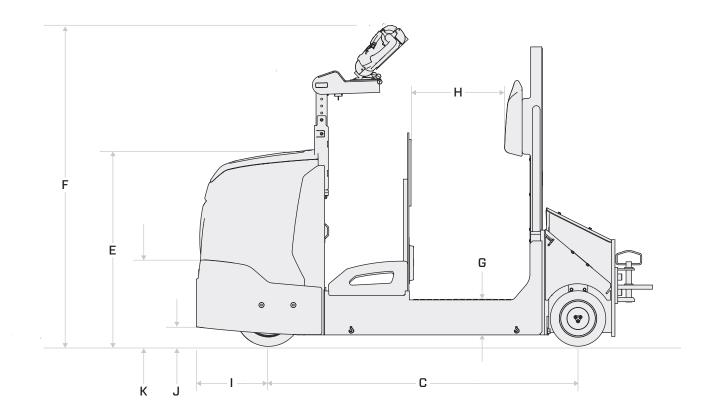



"THE NAME ON MY SHIRT SAYS TOYOTA, BUT I WORK FOR YOU."

Alan - 360 Technician, Atlas Toyota Material Handling, Chicago, IL



HELP IS ALWAYS HERE WITH TOYOTA 360 SUPPORT.

The industry's best and most comprehensive dealer network quickly delivers Toyota Certified Technicians to your work site. These specially trained technicians can also help assess your warehouse and facility needs to recommend the right equipment for the job. And with the largest fleet of used and rental material handling products, Toyota 360 keeps your business running at full speed.

ToyotaForklift.com/360-Support



Some product features described herein are optional. Please consult your dealer for specifications. Details of specifications and equipment are based on information available at time of printing and may change without notice.